


DOC-SPIL-0309 PF025004

## Dimensions

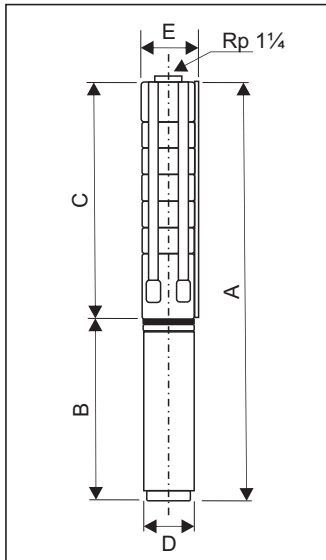

E - Max. diameter of pump, including the cable guard and the motor

QF2-75 and QF2-90 are mounted in a pipe sleeve with connection Rp 1 1/4

Technical parameters of range QF2												
Pump Model	Motor		C	Dimensions [mm]				Net weight [kg]				
	Model	Power [kW]		B		A		D	E	Pump	Motor	
				1X230V	3X220V 3X400V	1X230V	3X220V 3X400V				1 X 230	3X220V 3X400V
QF2 - 6	RO 100	0.37	312	352	302	664	614	95	101	3	8	8
QF2 - 9	RO 100	0.37	375	352	302	727	677	95	101	4	8	8
QF2 - 13	RO 100	0.55	459	367	317	826	776	95	101	5	9	9
QF2 - 18	RO 100	0.75	564	382	352	946	916	95	101	6	10	9
QF2 - 23	RO 100	1.1	669	422	382	1091	1051	95	101	7	12	10
QF2 - 28	RO 100	1.5	774	478	422	1252	1196	95	101	9	13	12
QF2 - 33	RO 100	1.5	879	478	422	1357	1301	95	101	10	13	12
QF2 - 28	RO 101	1.5	839	517	414	1356	1253	95	101	9	13	12
QF2 - 33	RO 101	1.5	944	585	414	1529	1358	95	101	10	13	12
QF2 - 40	RO 101	2.2	1091	585	480	1676	1571	95	101	11	18	16
QF2 - 48	RO 101	2.2	1259	585	480	1844	1739	95	101	13	18	16
QF2 - 55	RO 101	3.0	1406	-	547	-	1953	95	101	15	-	19
QF2 - 65	RO 101	3.0	1616	-	547	-	2163	95	101	17	-	19
QF2 - 75	RO 101	4.0	1826	-	623	-	2449	95	101	20	-	22
QF2 - 90	RO 101	4.0	2141	-	623	-	2764	95	101	23	-	22

## Hydraulic performances of range QF2

QF 2		Delivery Q										
		m <sup>3</sup> /h				0	1	1.4	1.8	2	2.4	2.8
		l /min.				0	16.7	23.4	30.1	33.4	40.1	46.8
Model	Connection	Motor		1 ~	3 ~	Head [m]						
		[KW]	[HP]	[A]	[A]							
QF2 - 6	Rp 1 1/4	0.37	0.5	3.6	2.5	36	33	30	26	23	16	12
QF2 - 9		0.37	0.75	3.9	2.5	54	50	45	39	35	25	18
QF2 - 13		0.55	0.75	3.9	4	78	72	65	57	51	35	26
QF2 - 18		0.75	1.5	5.8	4.2	108	99	91	79	70	49	36
QF2 - 23		1.1	1.5	7.4	6.2	138	127	116	100	90	63	46
QF2 - 28		1.5	2.0	7.3	7.6	168	154	141	122	109	76	55
QF2 - 33		1.5	2.0	10.2	7.6	198	182	166	144	129	90	65
QF2 - 40		2.2	3.0	10.2	10	240	220	201	175	156	109	79
QF2 - 48		2.2	3.0	15	10	288	264	242	209	188	131	95
QF2 - 55		3.0	4.0	15	27	330	303	277	240	215	150	109