


## Dimensions

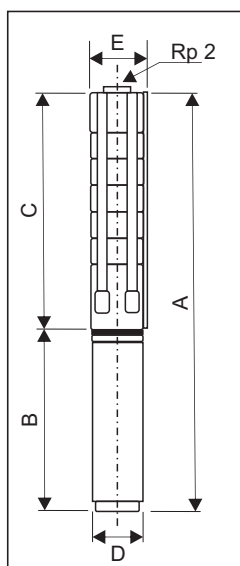

Technical parameters of range QF 20												
Pump	Motor		Размери [mm]							Net weight [kg]		
	Model *	Power [kW]	C	B		A		D	E	Pump	Motor	
Model		1X230V		3X220V 3X400V	1X230V	3X220V 3X400V						1X230V
QF 20 - 4	RO 100	1,1	445	382	352	827	797	95	101	6	10	9
QF 20 - 5	RO 100	1,1	510	424	382	934	892	95	101	6	12	10
QF 20 - 7	RO 100	1,5	640	478	-	1118	-	95	101	7	14	-
QF 20 - 7	RO 101	1,5	640	-	424	-	1064	95	101	7	-	12
QF 20 - 10	RO 101	2,2	835	588	485	1423	1320	95	101	8	21	16
QF 20 - 13	RO 101	3,0	1030	-	541	-	1571	95	101	11	-	19
QF 20 - 17	RO 101	4,0	1290	-	624	-	1914	95	101	14	-	22
QF 20 - 23	RO 101	5,5	1680	-	743	-	2423	95	101	19	-	27
QF 20 - 31	RO 101	7,5	2200	-	815	-	3015	95	101	24	-	31
QF 20 - 23	MTSF 150	5,5	1750	-	694	-	2444	138	143	19	-	48
QF 20 - 31	MTSF 150	7,5	2270	-	714	-	2984	138	143	24	-	50

\* Motor brand and type could vary upon request

## Hydraulic performances of range QF 20

QF - 20		Delivery Q								
		m <sup>3</sup> /h	0	2	4	6	8	10	12	
		l/min	0	33,4	66,8	100,1	133,6	167	200,1	
Model	Connection	Motor		Head [m]						
		[kW]	[HP]							
QF 20 - 4	Rp 2	0,75	1	27	26	25	24	22	20	18
QF 20 - 5		1,1	1,5	34	33	31	30	28	25	23
QF 20 - 7		1,5	2	47	46	44	42	39	35	32
QF 20 - 10		2,2	3	68	65	63	60	55	50	45
QF 20 - 13		3	4	88	85	81	78	72	65	59
QF 20 - 17		4	5,5	115	111	106	102	94	85	77
QF 20 - 23		5,5	7,5	155	150	144	138	127	115	104
QF 20 - 31		7,5	10	209	202	194	186	171	155	140